

Generator set data sheet

Model: C200 D5e
 Frequency: 50 Hz
 Fuel type: Diesel

Fuel consumption	Standby				Prime			
	kVA (kWe)				kVA (kWe)			
Ratings	200 (160)				182 (146)			
Load	1/4	1/2	3/4	Full	1/4	1/2	3/4	Full
gph	3.3	6.0	8.1	10.0	3.1	5.6	7.6	9.3
L/hr	15.1	27.4	36.8	45.3	13.9	25.5	34.5	42.3

Engine	Standby Rating	Prime Rating
Engine manufacturer	Tata Cummins Limited (JV)	
Engine model	QSB7-G5	
Configuration	4 cycle; in-line; 6 cylinder diesel	
Aspiration	Turbo charged and charge air cooled	
Gross engine power output, kWm	213	182
BMEP at set rated load, kPa	2537	2172
Bore, mm	107	
Stroke, mm	124	
Rated speed, rpm	1500	
Piston speed, m/s	6.2	
Compression ratio	17.2:1	
Lube oil capacity, L	19	
Overspeed limit, rpm	1800 ± 50	
Regenerative power, kW	14	
Governor type	Electronic	
Starting voltage	12 Volts DC	

Fuel flow	
Maximum fuel flow, L/hr	106
Maximum fuel inlet restriction, mm Hg	254
Maximum fuel inlet temperature, °C	71

Air	Standby Rating	Prime Rating
Combustion air, m ³ /min	12.72	12.30
Maximum air cleaner restriction, kPa	6.2	

Exhaust

Exhaust gas flow at set rated load, m ³ /min	35.8	34.1
Exhaust gas temperature, °C	561	544
Maximum exhaust back pressure, kPa	10.2	

Standard set-mounted radiator cooling

Ambient design, °C	50	
Fan load, kW _m	6.8	
Coolant capacity (with radiator), L	30.2	
Cooling system air flow, m ³ /sec @ 12.7 mmH ₂ O	5.91	
Total heat rejection, Btu/min	6516	5825
Maximum cooling air flow static restriction mm H ₂ O	8.12	

Weights*

	Open	Enclosed
Unit dry weight kgs	1644	3018
Unit wet weight kgs	1670	3044


* Weights represent a set with standard features. See outline drawing for weights of other configurations.

Dimensions


	Length	Width	Height
Standard open set dimensions mm	2656	1100	1822
Enclosed set standard dimensions mm	3904	1142	2276

Genset outline

Open set

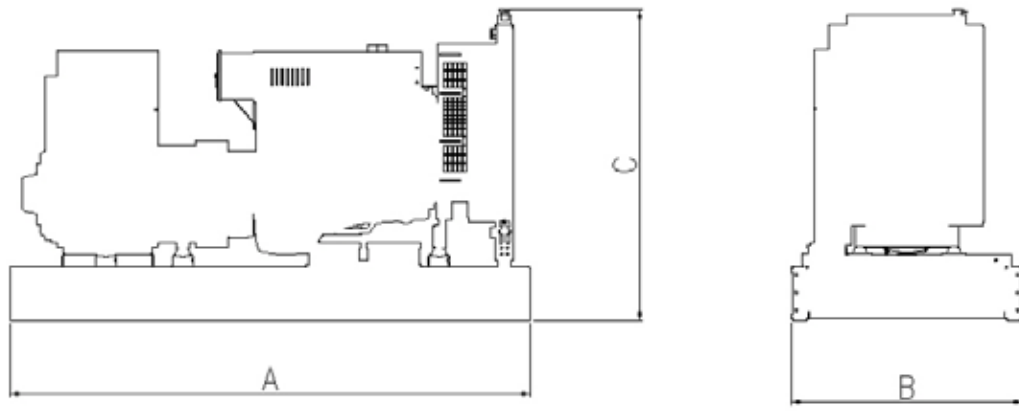

Enclosed set

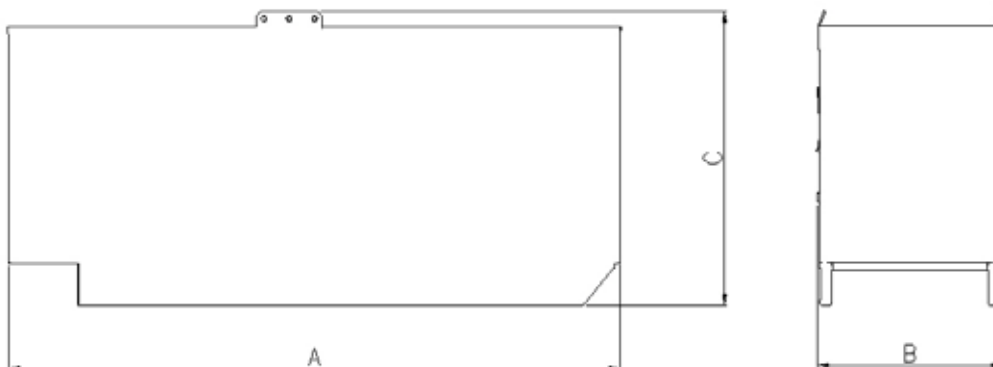

Outlines are for illustrative purposes only. Please refer to the genset outline drawing for an exact representation of this model.

Alternator data

Connection	Temp rise °C	Duty	Alternator	Voltage
Wye, 3-phase	163/125	S/P	UCI274H	380-415V
Wye, 3-phase	125/105	S/P	UCI274J	380-440V

Ratings definitions

Emergency standby power (ESP):	Limited-time running power (LTP):	Prime power (PRP):	Base load (continuous) power (COP):
Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789 and DIN 6271.	Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.	Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789 and DIN 6271.	Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) is in accordance with ISO 8528, ISO 3046, AS 2789 and DIN 6271.

Formulas for calculating full load currents:

Three phase output

$$\frac{\text{kW} \times 1000}{\text{Voltage} \times 1.73 \times 0.8}$$

Single phase output

$$\frac{\text{kW} \times \text{SinglePhaseFactor} \times 1000}{\text{Voltage}}$$

See your distributor for more information.

Cummins Power Generation
 Manston Park, Columbus Avenue
 Manston, Ramsgate
 Kent CT12 5BF, UK
 Telephone: +44 (0) 1843 255000
 Fax +44 (0) 1843 255902
 E-mail: cpg.uk@cummins.com

